


## Application

For general purpose and wide range of service in general industries, Civil Engineering, Mining, Shipbuilding, Steel production, quarrying and Automobile shop, Not suited for solution containing aromatic hydrocarbon

**Type** - Mandrel-Built Hose

**Finishing** - Wrapped Surface

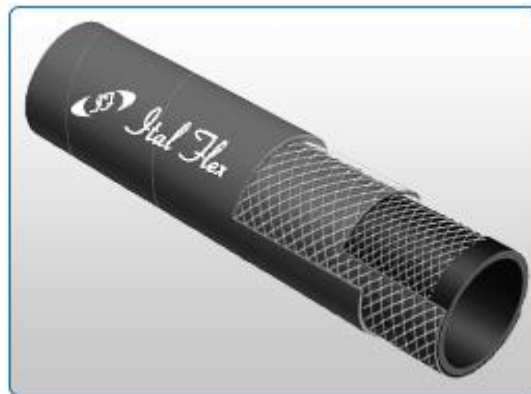

### Cover :

SBR Compound, Colour : Black or Yellow colour choices, Surface : Smooth or Corrugated

### Reinforcement:

High tensile Nylon Cord.

### Tube:

SBR / NR Compound

### Temperature Range:

-35°C to +90°C (-30°F to 195°F)

## Technical Specifications

Part No	ID x OD		Max. Work Pressure	Burst Pressure	Standard Length	Weight
	Inch	mm				
IF631-04	1/4	6.4 x 13	300	900	100	0.15
IF631-05	5/16	8.0 x 15	300	900	100	0.22
IF631-06	3/8	9.6 x 16.5	300	900	100	0.26
IF631-08	1/2	12.7 x 22	300	900	100	0.39
IF631-10	5/8	15.9 x 26	300	900	100	0.43
IF631-12	3/4	19.0 x 28	300	900	100	0.58
IF631-16	1	25.4 x 35	300	900	100	0.80
IF631-20	1 <sup>1/4</sup>	32 x 46	300	900	100	1.00
IF631-24	1 <sup>1/2</sup>	38 x 42	300	900	40	1.40
IF631-32	2	51 x 65	300	900	40	2.10
IF631-40	2 <sup>1/2</sup>	63 x 79	300	900	40	2.45
IF631-48	3	76 x 92	300	900	40	3.40
IF631-64	4	102 x 120	300	900	40	4.45
IF631-80	5	127 x 142	300	900	40	5.50
IF631-96	6	152 x 166	300	900	40	6.60

For more details or product related enquires feel free to call **+971-6-5424300** or Send online enquiry [Click here](#)