


Italflex Lay Flat Discharge Hoses

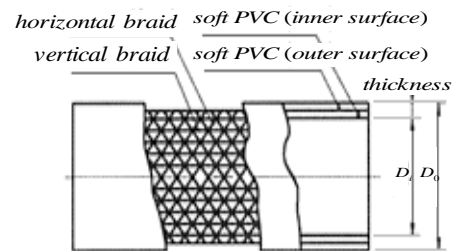

Uses

- Dam construction, public works
- High pressure work

Characteristics

- Working pressure 7 ~ 14kgf/cm²
- Excellent mobility
- Long
- High pressure resistance
- Frame resistance
- Temperature -40 °C to +55 °C

Lay Flat Discharge Hose (KH-40FR)		Inner Diameter	Thickness	Length (roll)	Pressure (at 20 °C)
mm	inch	mm	mm	M	kg/cm ²
40	1 1/2"	40	2.15	50,100	10
50	2"	52.5	2.25	50,100	10
65	2 1/2"	66	2.35	50,100	10
75	3"	77	2.45	50,100	10
100	4"	105	2.75	50,100	10
125	5"	128	2.80	50,100	10
150	6"	155	2.95	50,100	10
200	8"	207	3.00	50,100	10